


ADHAR INSTRUMENTS & SERVICES

multicore cable



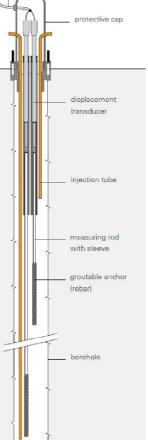

Multipoint Borehole Extensometer:

MPBX The (multipoint borehole extensometer) is designed to monitor changes in the distance between down hole anchors, each set at a specified depth in the borehole, and a measurement head at the surface. Rods extend upward from the anchors to the head, where measurements are made with depth micrometer а or displacement transducers.

MPBX heads are sized to accommodate measurement ranges up to 100mm.

APPLICATIONS

Tunnelling •Deep excavations •Dams •Foundations •Settlement monitoring •Rock displacements

2015

Advantages:

- Accurate, robust, high resolution and good long term stability.
- Reading unaffected by cable length
- Capable of withstanding thermal shock without defeating performance.

Specification:

- Sensor: Vibrating wire
- Range: 0-50mm, 100mm
- Accuracy: ±0.25%FS
- Operating Temperature: -20 to 60°C
- Rod: 6mm dia SS Rod with studs
- Anchor: 16mm dia, 250mm long groutable anchor

D-57, SECTOR-10, NOIDA, U.P. PIN: 201301 PHONE: +91 120 4120526, E-MAIL: INFO@AINST.IN